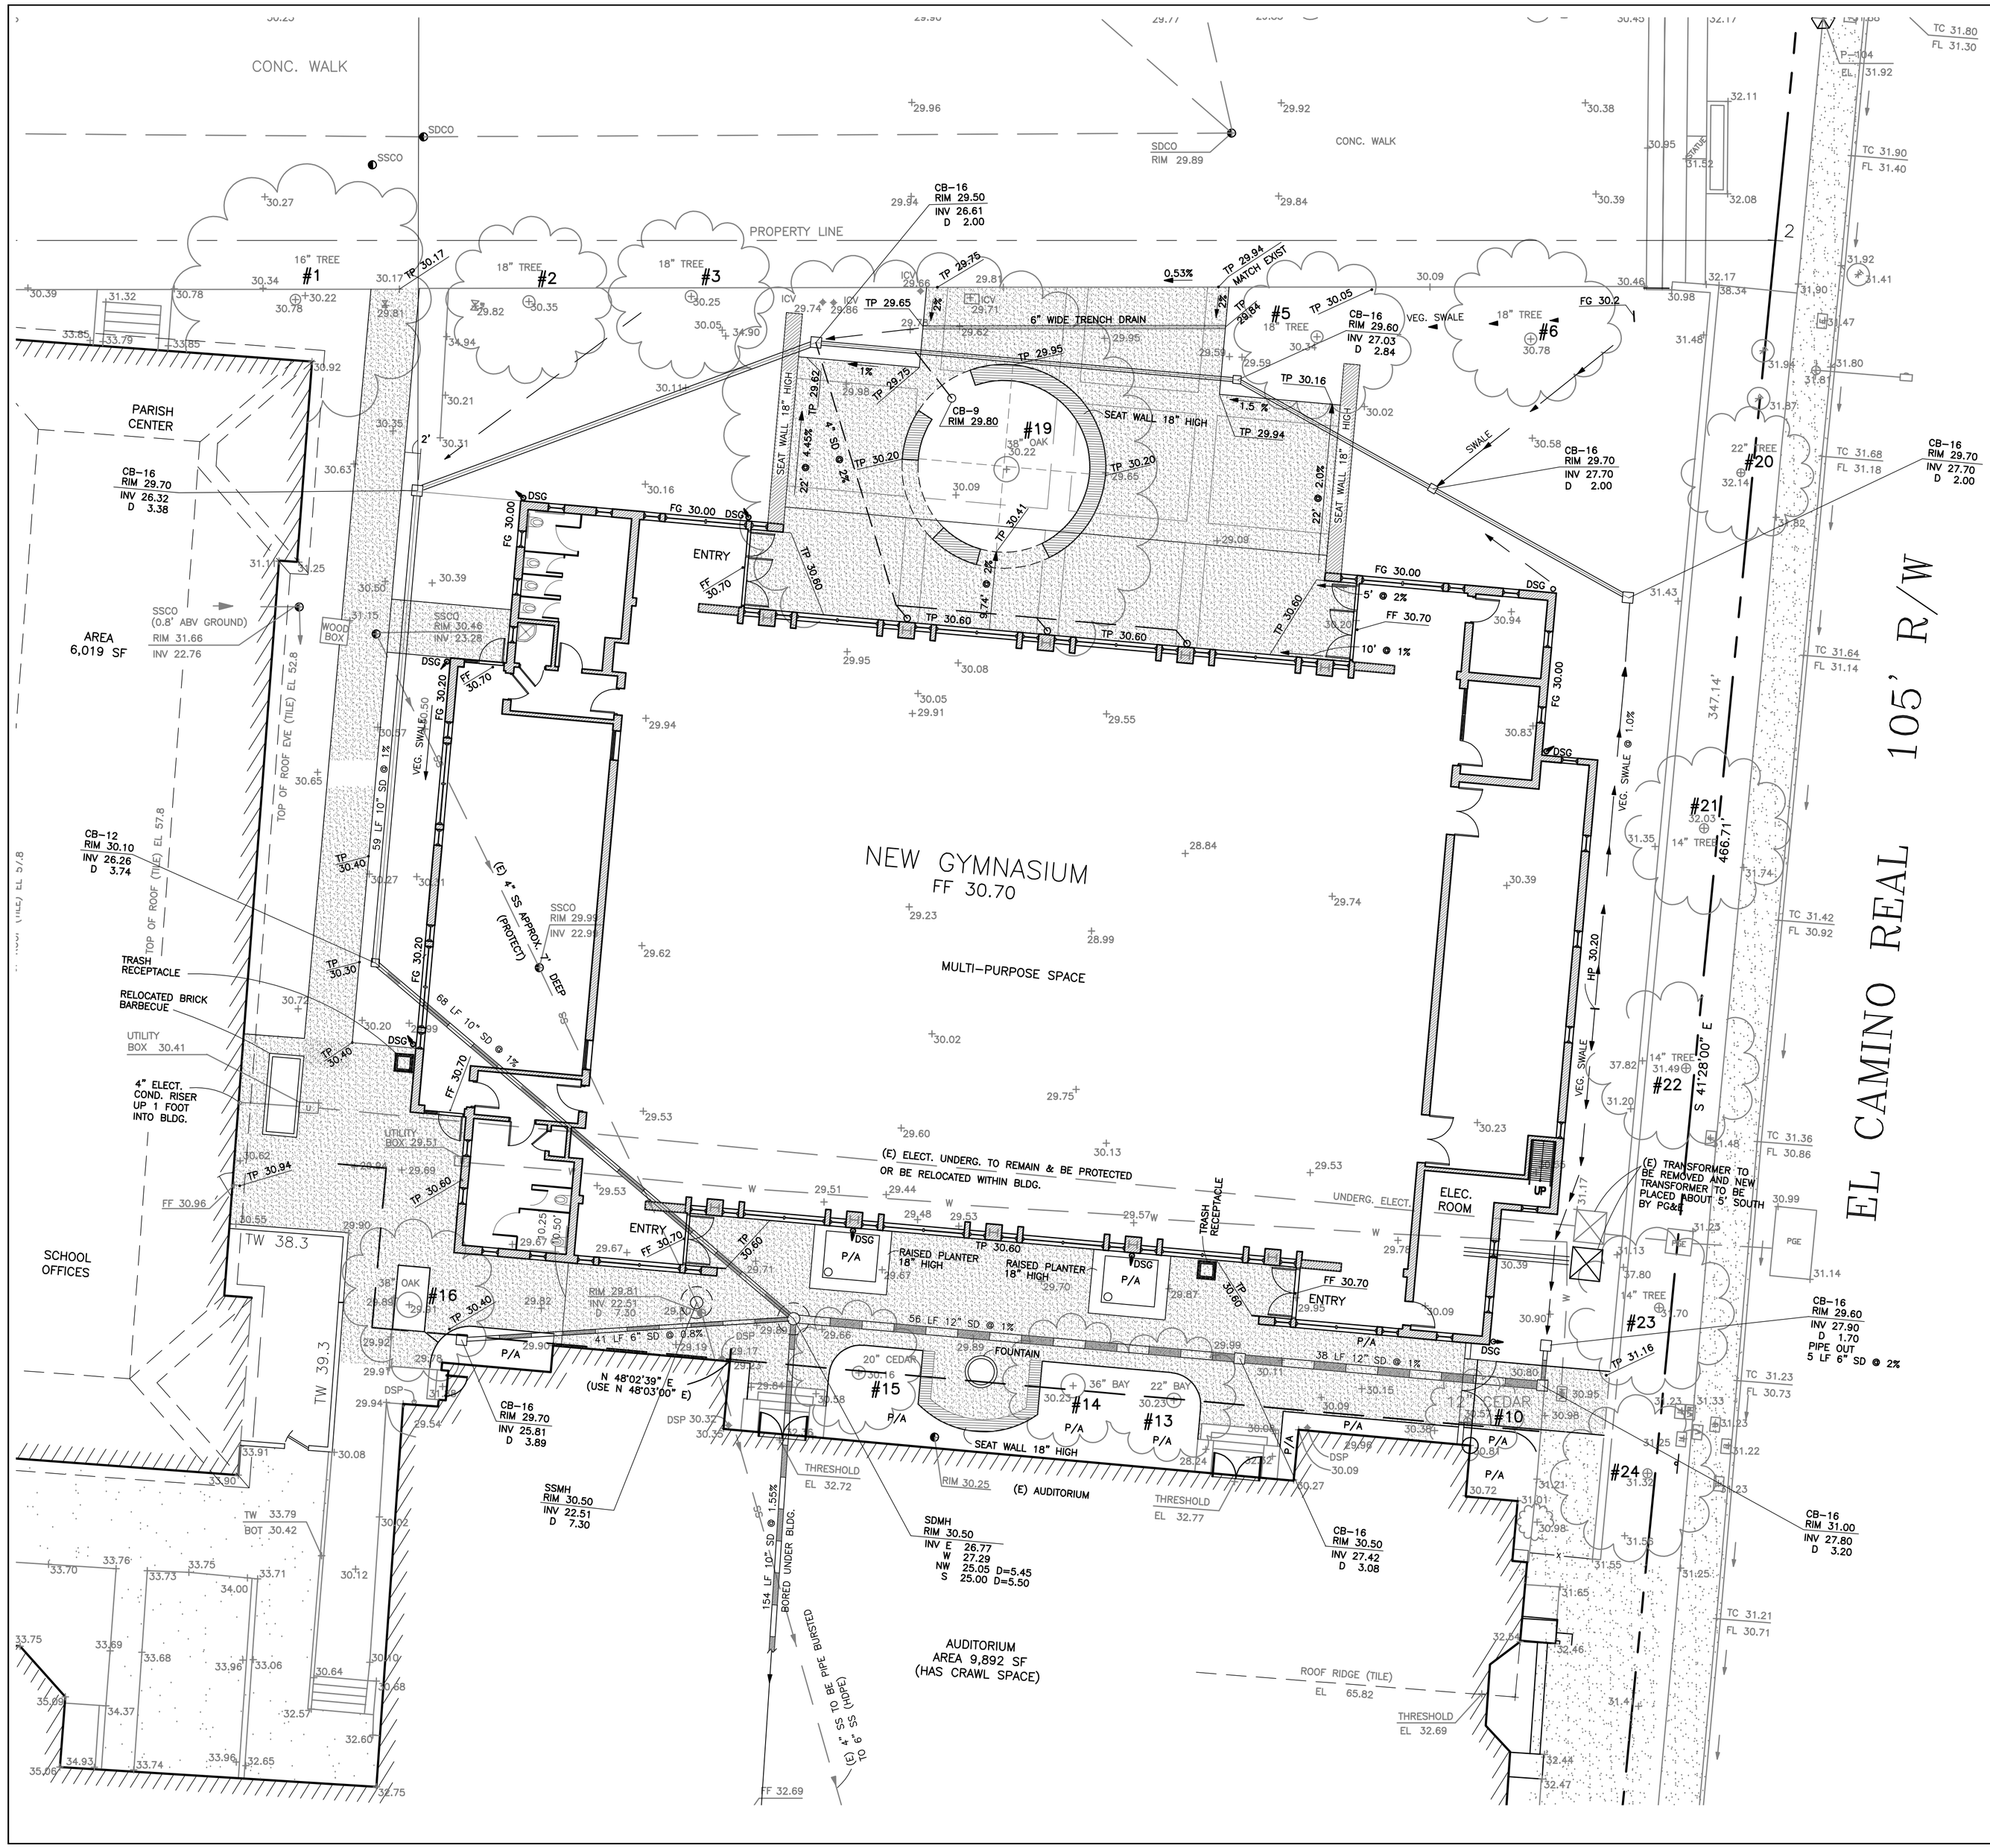

CIVIL NOTES

1. GENERAL. All work shall be in accordance with the requirements of the City of San Mateo. This includes the California State Building Code 2007 and applicable city amendments. For concrete and paving work it also includes Caltrans Standard Specifications, latest edition.

2. SITE ACCESS. The site shall be entered at the westerly driveway off of Notre Dame Ave. and it shall be exited out the southerly driveway to El Camino Real.

3. WORK AREAS AND SCHEDULES. This site is part of an active church and school. Work schedules shall be coordinated in an effort to avoid conflicts with church and school activities. Contact Jim Walsh at 344–7622, ext 105 for this coordination.

4. GEOTECHNICAL REPORT.

5. PUBLIC SAFETY -- TEMPORARY FENCING.

6. CONSTRUCTION STAKING.

7. UTILITY COORDINATION.

8. DRAINAGE REPORT.

9. EARTHWORK.

10. SANITARY SEWER.

11. STORM DRAINS.

12. WATER -- DOMESTIC AND IRRIGATION.

13. WATER --FIRE SPRINKLERS.

14. ELECTRICAL SERVICES.

15. SEAL COAT. The existing striping in the areas of proposed new work shall be covered with an asphalt emulsion seal coat.

16. CONCRETE CURBS. Shall be Class B, 5–sack, 2,000 psi. Add 2 lbs of lampblack per cubic yard for coloration. Subgrade shall be minimum 4" Class–2 Aggregate Base, compacted to 95%. Expansion joints with two ½" diameter smooth bars 12" long at 20' minimum intervals.

17. ASPHALT CONCRETE PAVEMENT (AC). Shall be per Caltrans specifications, Type "B" edium grading, AR 8000 penetration. Subgrade shall be compacted to 95% for a depth of 12". Asphalt thickness shall be 2.5" AC over 8" Class–2 Aggregate Base. Apply tack coat at the rate of 0.05 to 0.15 gallons per square yard to dry compacted aggregate base. Fog seal surface prior to striping.

18. TRAFFIC PAINT. Shall be Chlorinated rubber–alkyd type, AASHTO M248 (FS TT–P–115).

19. TRAFFIC SIGNS. For Accessible parking shall be baked enamel on metal as commercially supplied.

LAST ISSUE 7–22–2008
10/20± ADDED TITLE BLOCK
TURNED ON BLDG GRID LINES

Case+Abst Architects LLP
1033 POLK STREET
SAN FRANCISCO, CA 94109
415.361.3600

CIVIL ENGINEER
KAVANAGH ENGINEERING
708 CAROLAN AVENUE
BURLINGAME, CA 94010
650.579.1944

JOB NO. 0542 SMAT

REGISTERED PROFESSIONAL ENGINEER CHARLES L. KAVANAGH No. 20858 Exp. 9–30–11 CIVIL STATE OF CALIFORNIA

New School Gymnasium For:

Saint Matthew

Catholic Church

One Notre Dame Avenue, San Mateo, CA 94402

Date:	12-03-2010
Project Number:	611-101
Scale:	1" = 10'
Drawn By:	DIS/CLK

No.	Revision	Date
6	Planning Submittal	..-..-..
5	Planning Submittal	12.18.08
4	Planning Submittal	07.24.08
3	Planning Submittal	01.24.08
2	Planning Submittal	09.14.07
1	Planning Submittal	06.07.07

Sheet Title

GYMNASIUM AREA
CIVIL PLAN

Sheet Number

C-5

These drawings constitute the original and unpublished work of Case+Abst Architects LLP and may not be duplicated, used, or disclosed without written consent of the Architect.